


Roof mount antenna 62 ... 300 MHz / Car radio AM/FM

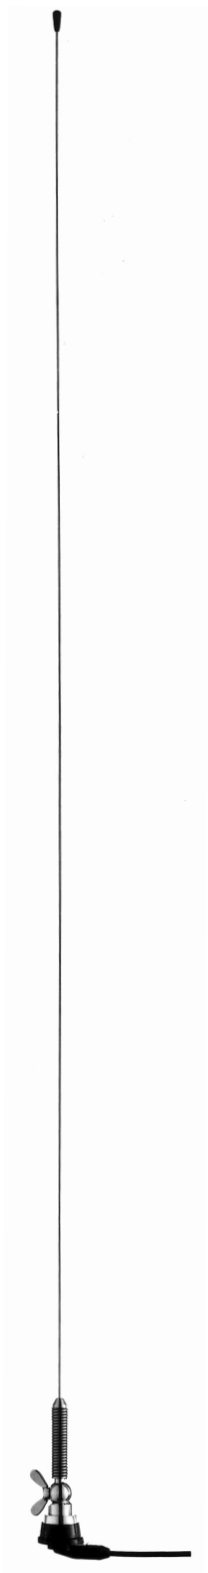

K 50 53 4

Type No. K 50 53 4 Ord. No. 510 314	With spring, 62 ... 300 MHz, 0 dB gain (ref. to quarter-wave whip), supply length 1285 mm
Connection	Fixed cable RG 058-PE, 5 meters long, without radio set connector.
Maximum load	100 W (at 50 °C ambient temperature)
Tuning	By shortening the whip (please note mounting instructions).
Mounting	In bore hole (24 mm diameter) from the external side of the car body.
Built-in depth	14 mm
Max. diameter at base	38 mm
Material	Whip and spring: Stainless steel. Swivel-joint parts: Chromium-plated brass. Base: Weather resistant plastic.
Contents of delivery	Whip, base with cable, philips screw.
Accessories	For AM/FM reception (VHF) the coupler K 62 27 4 (Ord. No. 510 431) is required.
Components	Type No. (Ord. No.)
Whip	K 50 47 40 41 (510 300)
Base	K 50 55 20 31 (510 142)
Swivel-joint screw*	K 66 00 6 (510 154)
Tip protection	K 66 01 9 (510 159)

* butterfly bolt + philips screw + locking washer